

HIGH/LOW BAY LUMINAIRE



High Bay Aluminum Closed (B) Style With Circline Bulb

Features:

- Die cast aluminum ballast casing with powder coated finish for corrosion-resistance.
- High purity aluminum reflector with vacuum coated inner surface.
- Acrylic lens.

Lamp and Ballast:

- Miller's 70W~200W round tubular induction lamp features high lighting efficacy, long lifetime, good color rendering, stable output, etc.
- Miller's electronic ballast features high power factor (>0.95), flickering free, low loss, constant output, 70W-120W=19" and 150W-200W=22"


Applications:

- Stadium, workshop, warehouse, airport, railway station, gas station, amusement park, exhibition hall, supermarket.




Dimensions:

Unit: in.(mm)

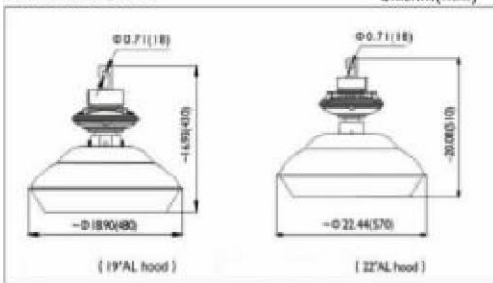

Photometric:

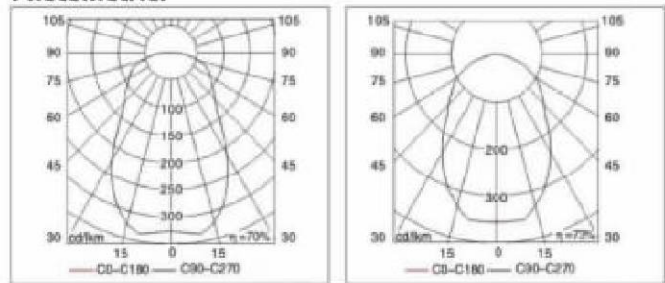

Fixture Specification:

Product No.	Fixture Model No.	Lamp	Wattage (W)	Voltage (V)	Color Temperature (K)	Ambient Temperature (°C)	Installation	IP class	UL CUL
FHB1970ALB	FHB19-B		70	120~277	5000	-20°C~+40°C	Hook	IP43(Control Gear)	
FHB1980ALB			80				Hanging Pole		✓
FHB19100ALB			120				Hook		
FHB19120ALB			150				Hanging Pole		✓
FHB22150ALB	FHB22-B		200				Hook		✓
FHB222200ALB							Hanging Pole		