

## □ Roadway Rectangular Glass

### Features:

- Die cast aluminum ballast casing with powder coated finish for corrosion- resistance.
- Reflector made of high quality aluminum plate. Clear tempered glass lens with transmittance up to 90%.
- Timer dimming function available upon request.

### Lamp and Ballast:

- Miller's 100W~150W square tubular induction lamp features high lighting efficacy, long lifetime, good color rendering, stable output, etc.
- Miller's electronic ballast features high power factor (>0.95), flickering free, low loss, constant output, etc.


### Applications:

- Freeway, highway, parking lots, public entrances, off-street areas.



### Dimensions:

Unit:in.(mm)

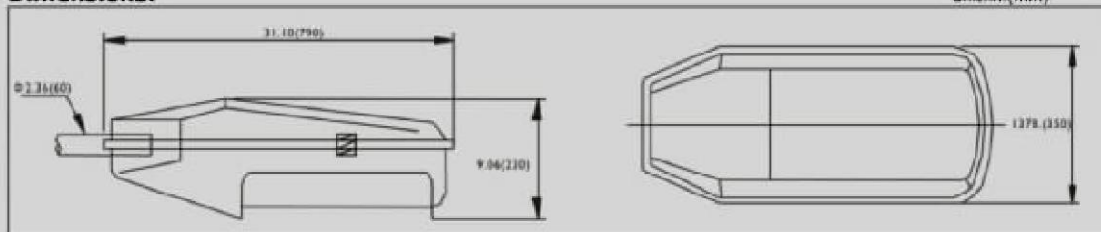

### Fixture Specifications:

Product No.	Fixture Model No.	Lamp	Wattage (W)	Voltage (V)	Color Temperature (K)	Ambient Temperature (°C)	Installation	IP class
RL100RECT	RL100-GLASS		100	120~277	5000	-20°C~+40°C	Round Pole Φ60	IP54
RL120RECT	RL120-GLASS		120					
RL150RECT	RL150-GLASS		150					