

□ Tunnel Fixture 100W Heavy Duty

Feature:


- Square profiled aluminum housing concealed with two extruded welding side covers for high IP rating
- Anodized aluminum reflector and clear tempered glass lens are designed to optimize light distribution.
- Gas-tight silicon rubber seal made for wet locations. Front opening structure, easy for maintenance.
- 100W fixture with emergency function: DC 24V running for two hours with 25W lamp watt dimming during power off. Emergency lamp watts and emergency time can be varied upon request.

Lamp and Ballast:

- Miller's 100W square tubular induction lamp features high lighting efficacy, long lifetime, good color rendering, stable output, etc, improving driving environment and safety, saving energy and decreasing overall running cost.
- Miller's electronic ballast features high power factor (>0.95), flickering free, low loss, constant output, etc.


Applications:

- Tunnel, freeway, highway, parking lots, public entrances, off-street areas.

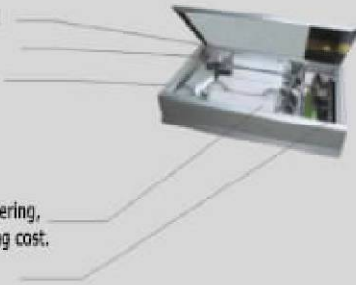


Dimensions:

Unit:in.(mm)

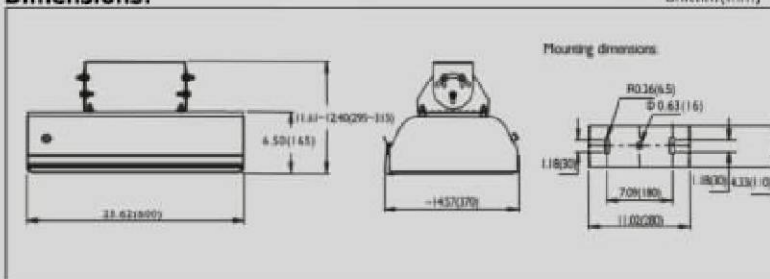

Photometric:



Fixture Specifications:

Product No.	Fixture Model No.	Lamp	Wattage (W)	Voltage (V)	Color Temperature (K)	Ambient Temperature (°C)	Installation	IP class
TL100HD	TL100-H		100	120~277	5000	-20°C~+40°C	*U* Bracket Horizontal ±30*	IP65