

TUNNEL LUMINAIRE



Tunnel Fixtures



Features:

- Square profiled aluminum housing concealed with two extruded welding side covers for high IP rating.
- Anodized aluminum reflector and clear tempered glass lens are designed to optimize light distribution.
- Gas-tight silicon rubber seal made for wet locations.
- Front opening structure, easy for maintenance.



Lamp and Ballast:

- Miller's 70W~200W square tubular induction lamp features high lighting efficacy, long lifetime, good color rendering, stable output, etc.
- Miller's electronic ballast features high power factor (>0.95), flickering free, low loss, constant output, etc.

Applications:


- Tunnel, freeway, highway, parking lots, public entrances, off-street areas.

Dimensions:

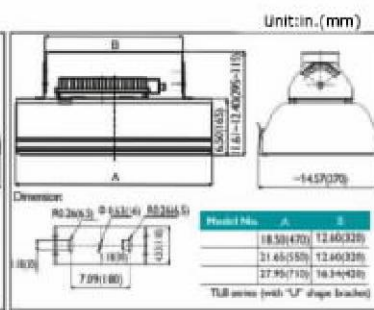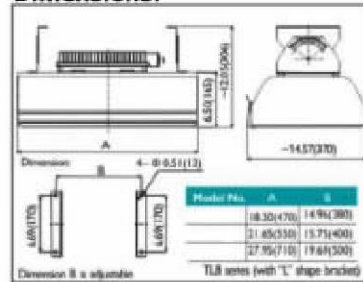

Unit:in.(mm)

Photometric:

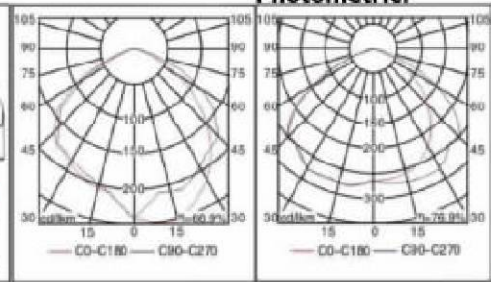

Fixture Specifications:

Product No.	Fixture Model No.	Lamp	Wattage (W)	Voltage (V)	Color Temperature (K)	Ambient Temperature (°C)	Installation	IP class	UL CUL
TL70	TL70-FIX		70	120~277	5000	-20°C~+40°C	*U*Bracket, Horizontal ±30*	IP65	
TL85	TL85-FIX		80				*L*Bracket, Horizontal ±30*		✓
TL100	TL100-FIX		120				*U*Bracket, Horizontal ±30*		✓
TL120	TL120-FIX		150				*L*Bracket, Horizontal ±30*		
TL150	TL150-FIX		200				*U*Bracket, Horizontal ±30*		
TL200	TL200-FIX						*L*Bracket, Horizontal ±30*		