

Features:

- Square profiled aluminum housing concealed with two extruded welding side covers for high IP rating.
- Anodized aluminum reflector and clear tempered glass lens are designed to optimize light distribution.
- Gas-tight silicon rubber seal made for wet locations.
- Front opening structure, easy for maintenance.

Lamp and Ballast:

- Miller's 250W~400W square tubular induction lamp features high lighting efficacy, long lifetime, good color rendering, stable output, etc.
- Miller's electronic ballast features high power factor (>0.95), flickering free, low loss, constant output, etc.


Applications:

- Stadium, workshop, warehouse, airport, railway station, gas station, amusement park, exhibition hall, supermarket.




Dimensions:

Unit:in.(mm)

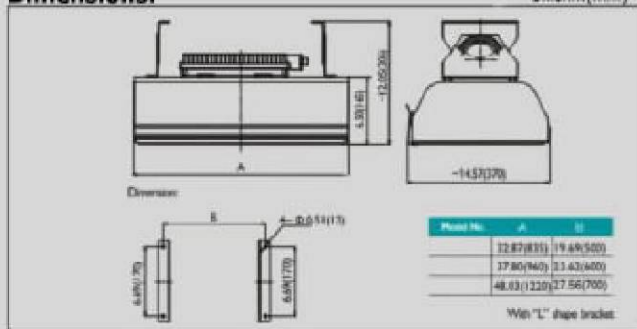

Photometric:



Fixture Specifications:

Product No.	Fixture Model No.	Lamp	Wattage (W)	Voltage (V)	Color Temperature (K)	Ambient Temperature (°C)	Installation	IP class	UL CUL
TL250A	TL250-TL		250	120~277	5000	-20°C~+40°C	"L" Bracket, Horizontal ±30°	IP65	✓
TL300A	TL300-TL	300	"L" Bracket, Horizontal ±30°				✓		
TL400A	TL400-TL	400	"L" Bracket, Horizontal ±30°				✓		
							Hanging Pole		