

□ Indoor High Bays

Features:

- White powder coated steel fram for corrosion resistance.
- Low glare, anodized aluminum parabolic louver for excellent visual control.

Lamp and Ballast:

- Miller's 250W or 400W square tubular induction lamp features high lighting efficacy, long lifetime, good color rendering, stable output, etc.
- Miller's electronic ballast features high power factor (>0.95), flickering free, low loss, constant output, etc.


Applications:

- Office, shopping malls, railway station, schools, workshop, etc.




Dimensions:

Unit: In.(mm)

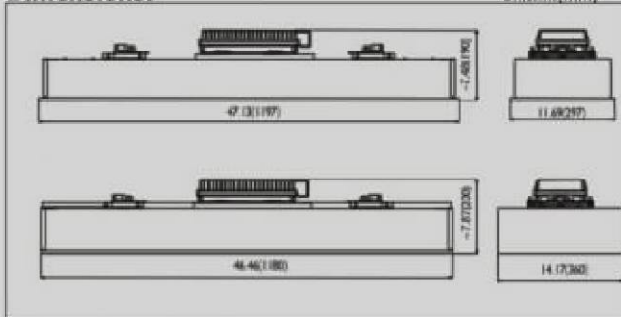

Photometric:

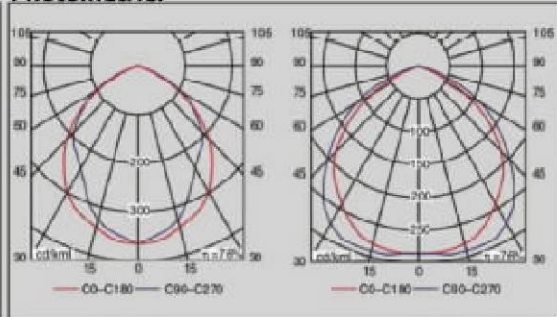

Fixture Specifications:

Product No.	Fixture Model No.	Lamp	Wattage (W)	Voltage (V)	Color Temperature (K)	Ambient Temperature (°C)	Installation	IP class
FIHB250	FIHB250-HIGH		250	120~277	5000	0°C~+40°C	Hanging Pole	IP20
			Chain					
FIHB400	FIHB400-HIGH	400				Hanging Pole		
						Chain		