

PHENOLIC INCANDESCENT SOCKETS


Pull Chain with Outlets

A. L1406B - Black B. L1406-Ivory
250W 125V



- A. (T1) Keyless 660W-250V
- B. (T2) Pull Chain 250W-250V
- C. (T3) 3-Way 250W-250V
- D. (T4) Single Circuit 250W-250V

Ring 2-1/8" O.D. included, socket height 2-5/8", socket thread slips 1-3/8" minimum, 1/8" IP

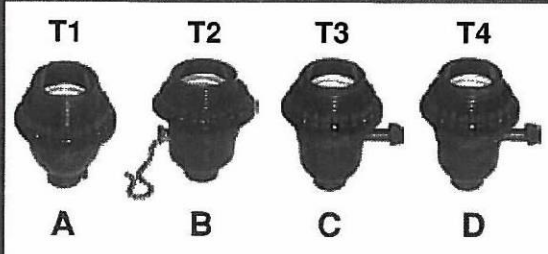

CANDELABRA SOCKETS

Spring Clips

L10017-6 - 6" lds
Snaps into 1" Diameter Hole




Hickey Sockets

75W-125V leads-18ga.


L150-2 L10017-62F
1-3/4" High 24" 1-3/4" High Leads
Leads, 150 C° 24", 105 C°

L10017-241F L10017-204F
3" High Leads 4" High Leads
24", 105 C° 24", 105 C°

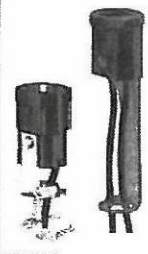

**Twin Cluster
LD1019**


3-1/4" end to end 1/8 IPS tapped
bracket 75W-125V



Candelabra Phenolic Socket

Sockets have Screw Terminals
Insulators included 75W 125V

- A. L10027 -1-3/4" High domestic
- B. L10025 -Height 2" domestic
- B1. L10025-2 - Height 2" import
- C. L10026 -domestic
- C1. L10026-2 - import

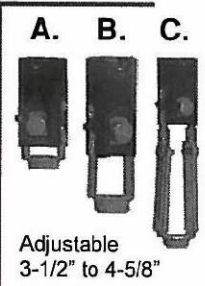

Adjustable
3-1/2" to 4-5/8"

Porcelain with Screw Terminals

approved for 170 C°. applications
75W-125V

L20025 -height 2-3/32"
Adjustables

- A. L20026 -3-1/2"- 4-5/8"
- B. L20026-2 -4-1/2"-5-1/2"



Harness Set

L10032-500

75W-250V
1 to 500 cut to order 13"
center to center




New 2-Piece Positive Lock Clips

Hickeys

- A. L201H -1 3/4"
- B. L206H -3"
- C. L210H -4"

no more twisted wires no special tools
needed sizes available to fit most stan-
dard covers UL & CSA listed clips riv-
eted to lampholder. 75W 125V

L2PSC



**Threaded Body Sockets
Candelabra**

L10032F

Plastic Nut Included



Molded Plastic Nut

BA23569



Flat Brass Nut

LX25297



USA & CANADA
1-800-445-6611
FAX: 1-800-445-6690



PHOENIX, AZ
Phone: 602-268-0001
Fax: 602-268-0130