


T2 - T5 - T8 HALOGEN SOCKETS

T2 Sockets with spring supports

MVS509253



T5 Socket

(H - 26mm x W - 19mm)


MVS100305

(push-through)



T5 Shunted Sockets

- A. MVS508266 - push-through with stop
- B. MVS508267 - push-through no stop
- C. MVS508274 - snap-in type



T8 Bi-Pin

(660W-600)

L23652 - shunted

Use for 20-25 ga. panels



T8 Bi-Pin Low Profile

(For T-8 Lamps)

L469ANASA

Rated 660W-660V, Nut screw inserted
H - 1-17/32



**Metal Halide Lampholders
GX8.5 Base**

Ideal for indoor accent and display lighting, including gallery, museum and showroom applications. Designed for energy-efficient CDM-R11 lamps

L565

660W-600W, 5KV Pulse Rated,
Accepts Metal Halide G8.5 Lamps




**Metal Halide Lampholders
G8.5 Base**

Ideal for indoor accent and display lighting, including gallery, museum and showroom applications


L560

660W-600W, 5KV Pulse Rated,
Accepts Metal Halide G8.5 Lamps



**Bottom-Wire Slide-On
Socket for T8 and T12 Lamps**


- A. L13660 - tall profile non shunted
- B. L23660 - tall profile shunted
- C. L13661 - med profile non shunted
- D. L23661 - med profile shunted



G4, GX5.3, GY6.35, GZ4 Socket
(For Low Voltage Halogen Lamps)


- A. MVS101274 - mounting plate
- B. MVS101275 - mounting bracket

250°C 18 awg leads 5-1/2"

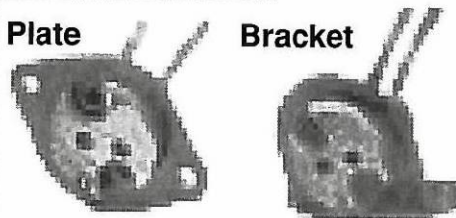

G8.5 Lampholder

- A. MVS106189 - insulation plate
- B. MVS502394 - socket

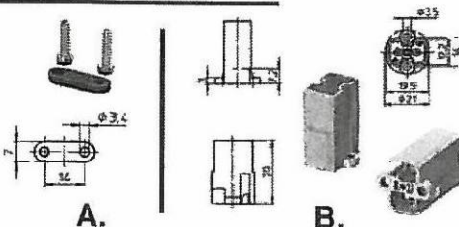

USA & CANADA

1-800-445-6611

FAX WATS 1-800-445-6690

WWW.MillerLightingProducts.com



PHOENIX, AZ

Phone: 602-268-0001

Fax: 602-268-0130

Customerservice@MillerLightingProducts.com