

WIRES & CORDSETS

Bulk Spooled Rolls Lamp & Fixture Wire

18/2 SPT-1 105 °C rated 300V
250 ft. spools - 2500 ft. spools

- A. W205 - ivory
- B. W206 - brown
- C. W208 - clear gold
- D. W209 - white
- E. W210 - black
- F. W211 - clear (silver)
- G. W215 - 2500 ft only clear (gold)
- H. W216 - 2500 ft only clear (silver)



18/2 SPT-2

105 °C rated 300V 250 ft. spools


- A. W217 - clear gold
- B. W218 - brown
- C. W219 - white
- D. W220 - black



Fixture & Appliance Wire

18 AWM/MTW TFF 105 °C rated
600V (500' ft spools)


- A. W253 - white
- B. W254 - black



16/2 SPT-2

105 °C, 300V, 250' ft spools

- A. W221 - clear (gold)
- B. W222 - brown
- C. W223 - white
- D. W224 - black



PLT Wire (250' ft spools)


Ideal for use where small
wire is needed

(22/2 PLT)

- A. W228 - ant. (gold)
- B. W229 - clear (gold)
- C. W230 - white
- D. W231 - black

(20/2 PLT)

- E. W304 - clear (gold)



SPT - Type 3 Conductor

105 °C, 250' ft spools

- A. W225 - clear (gold)
- B. W226 - white
- C. W227 - black



Uninsulated Copper Grounding Wire

(500' Spools)

- A. W238-500 - bare copper
- B. W239-500 - tinned copper (silver)
(2500' Spools)
- C. W240 - bare copper
- D. W241 - tinned copper (silver)



18 gauge

Ground Terminal with Lead

(Wire is 18 Ga. Bare Copper)

- A. L794-9 - 1/8 IPS with 9" lead
- B. L794-21 - 1/8 IPS with 21" lead
- C. L794-32 - 8/32 with 9" lead



Ground Terminal

Uses 18 Ga. Bare Copper Wire

- A. L794 - Fits 1/8 IPS Nipples
- B. L794-4 - Fits 1/4 IPS Nipples



Rayon Covered Wire

For the Old Antique Appearance
18/2 P.O. Wire, 250' spool

- A. W248 - white
- B. W246 - brown
- C. W247 - gold



SPT - Type 3 Conductor

105 °C, 250' ft spools

- A. W225 - clear (gold)
- B. W226 - white
- C. W227 - black



SVT type PVC Round

Fits through 1/8 IPS pipe, 250 ft. spools

(Two Conductor)

- A. W242 - white
- B. W243 - black

(Three Conductor)

- C. W244 - white
- D. W245 - black



SJT type PVC Round

Fits through 1/4 IPS pipe, 250 ft. spools

(Two Conductor)

- A. W249 - white
- B. W250 - black

(Three Conductor)

- C. W251 - white
- D. W252 - black



USA & CANADA

1-800-445-6611

FAX: 1-800-445-6690


O.E.M. SUPPLIES, INC.

PHOENIX, AZ

Phone: 602-268-0001

Fax: 602-268-0130

Visit us online at: www.lightingparts.com

E-mail us at: customerservice@lightingparts.com

WIRES & CORDSETS

Cordsets

wire rated 300V, 18/2 - 105°C moulded plugs

SPT-1

- A. W232 - 8' brown
- B. W232BL - 8' black
- C. W233 - 8' clear (gold)
- D. W234 - 8' white
- E. W265 - 8' silver
- F. W265-10 - 10' brown
- G. W303 - 10' brown
- H. W303BL - 10' black
- I. W320 - 12' brown
- J. W237-15 - 15' clear (gold)
- K. W237 - 16' clear (gold)

SPT-2

- A. W232-2 - 8' brown
- B. W232BL-2 - 8' black
- C. W233-2 - 8' clear (gold)
- D. W234-2 - 8' white
- E. W265-2 - 8' silver
- F. W265-10-2 - 10' silver
- G. W303-2 - 10' brown
- H. W303BL-2 - 10' black
- I. W320-2 - 12' brown
- J. W320BL-2 - 12' black
- K. W265-12-2 - 12' silver



Cordset with Switch & Socket

(Switch 24" from Socket 105°C)

SPT-1

- A. L180-6 - 6' white
- B. L180-17 - 8' white

SPT-2

- C. L180-17-2 - 8' white
- D. L180-6-2 - 6' white



Acryflex-F Sleaving

(Natural color-250 ft. rolls)
other colors available

Acrylic coated fiberglass. Superior flexibility and mechanical toughness
clas 155°C

- A. ACFL9 - inside dia .124 inch
- B. ACFL3 - inside dia .249 inch



Cordset with On/Off Switch & Socket

(Switch 24" from Socket 105°C)

SPT-1

- A. L180W - 8' white
- B. L180B - 8' brown
- C. L180G - 8' clear gold
- D. L180-15 - 15' switch from end

SPT-2

- C. L180W-2 - 8' white
- D. L180B-2 - 8' brown
- E. L180G-2 - 8' clear gold



Leviton Surge Protective Devices

Plug Strip

- A. L4900PST - 15A 125 AC
Multi-stage protection 6-outlet plug strip w/2 RJ11 phone jacks
- B. L4800PS - 15A 125 AC
All purpose, 6 outlet plug strip w/ 6' power cord



Plug Strip

Computer Grade Plug Strip

- A. L4950PSC - 15A 125 AC
EMI/RFI noise attenuation for micro-processor-driven electronic equipment.
- B. L4950PCS - 15A 125 AC
EMI/RFI noise attenuation for micro-processor-driven electronic equipment.



Computer Grade Plug Strip

Power Cords

SJT 16/3 Black

- A. W163J8B - 8'
- B. W163J10B - 10'

SJT 18/3 Black

- C. W183J6B - 6'
- D. W183J8B - 8'
- E. W183J10B - 10'
- F. W183J12B - 12'

SJT 14/3 Black

- G. W143J8B - 8'



Underground Low Voltage Wire

Direct Burial Cable 300V

500' Spools 105°C

Sizes:

- A. DBC16
- B. DBC12
- C. DBC10
- D. DBC8

Solid Fixture Wire

18 AWM/TEW

500' Spools 105°C

- A. W204 - white
- B. W203 - black

USA & CANADA

1-800-445-6611

FAX: 1-800-445-6690


O.E.M. SUPPLIES, INC.

PHOENIX, AZ

Phone: 602-268-0001

Fax: 602-268-0130

Visit us online at: www.lightingparts.com

E-mail us at: customerservice@lightingparts.com

WIRES & CORDSETS

High Temperature Wire Connector (Switch 24" from Socket 105°C)

WP3B

UL listed, 100 Pcs per pack only,
300V / 150°C, #22-#14 awg, Max.2
#16 / Min.3 #22, Black



SVT Strain Reliefs A7B - black



SVT Strain Reliefs

- A. A6B - black
- B. A6W - white



Screw-On Wire Connectors (Spring Inserts)

- W71 - gray D. W74 - yel.
 - A. W72 - blue E. W76 - red
 - B. W73 - orng. C. W80 - yel. wing nut
- bulk pack only minimum 100 pcs.



Bakelite Bushings (Male)

- A. W84 - white (1/8 IPS)
- B. W85 - black (1/8 IPS)
- C. W88 - white (1/4 IPS)
- D. W89 - black (1/4 IPS)

(Male)



- (Female)
- A. W82 - white (1/8 IPS)
 - B. W83 - black (1/8 IPS)
 - C. W86 - white (1/4 IPS)
 - D. W87 - black (1/4 IPS)

(Female)



Porcelain Connectors (high heat applications)

- A. W77-P - 2-4 #18
- B. W78-P - 2-5 #18
- C. W79-P - 2-4 #16




"Snap-In" Bushing (hole size: 7/16)

- A. W90 - black
- B. W91 - white
- C. W90-6 - black



Plastic Pipe Hole Bushing Fits into pipe to protect against Wire Cuts

- A. W28 - 1/8 IPS
- B. W28-4 - 1/4 IPS



Strain Relief for SPT - 1 hole 7/16"

- A. W53 - black
- B. W54 - white



Insulated Strain Relief W75



Metal Strain Relief W96

use with SVT or SJT cord



SVT Strain Reliefs

- A. A3B - black
- B. A3W - white



Easy Push-In Wire Nuts

UL & CSA approved

- A. WW162 - yellow 2-conductor
- B. WW112 - green 2-conductor
- C. WW164 - orange 4-conductor
- D. WW114 - green 4-conductor
- E. WW124 - white 4-conductor
- F. WW166 - purple 6-conductor
- G. WW116 - green 6-conductor
- H. WW168 - grey 8-conductor
- I. WW118 - green 8-conductor

All take: 12-16 AWG stranded copper
(stranding pattern less than or equal to 19)
12-18 AWG solid copper

600V building wiring, 1000V fixtures & signs,
20A maximum, 150°C rated (221°F)

Clear housing allows visual confirmation
of connection. Test port for easy continuity
testing



3 Conductor Spring Pressure Clamp Connector

WW22


3-Conductor with
Levers, Cross
Section: 3 x 28-12
AWG Solid or Stranded,
600V/20A, Color: gray,
Subpack: 50



Easy as
1, 2, 3



1) strip wire



2) push up lever



3) insert conductor and push

USA & CANADA
1-800-445-6611
FAX: 1-800-445-6690



O.E.M. SUPPLIES, INC.

PHOENIX, AZ
Phone: 602-268-0001
Fax: 602-268-0130

Visit us online at: www.lightingparts.com

E-mail us at: customerservice@lightingparts.com

CABLE TIES & SHRINK TUBING

Heat Shrink Tubing

18-22 (1/8" ID)

- A. MHST103C25 - 25' clear
- B. MHST103B25 - 25' black
- C. MHST103C100- 100' clear
- D. MHST103B100- 100' black

12-18 (3/16" ID)

- A. MHST104C25 - 25' clear
- B. MHST104B25 - 25' black
- C. MHST104C100- 100' clear
- D. MHST104B100- 100' black

8-12 (1/4" ID)

- A. MHST105C25 - 25' clear
- B. MHST105B25 - 25' black
- C. MHST105C100- 100' clear
- D. MHST105B100- 100' black

2-6 (1/2" ID)

- A. MHST107C25 - 25' clear
- B. MHST107B25 - 25' black
- C. MHST107C100- 100' clear
- D. MHST107B100- 100' black



All Plastic Cable Ties

Standard cable ties are molded one-piece ties in high quality standard natural and nylon. All are 100 piece packs

- A. MCT100 - 4" clear 18 lb
- B. MCT100B - 4" black 18 lb
- C. MCT200 - 5 3/4" clear 40 lb
- D. MCT200B - 5 3/4" black 40 lb
- E. MCT400 - 7 1/2" clear 50 lb
- F. MCT400B - 7 1/2" black 50 lb
- G. MCT500 - 11 1/4" clear 50 lb
- H. MCT500B - 11 1/4" black 50 lb
- I. MCT600 - 14 1/2" clear 50 lb
- J. MCT600B - 14 1/2" black 50 lb



Starter Assortment Thin Wall Heat Shrink

MNSPA5188 - 6" long

CONTENTS:

- A. - 1/8 ID black
- B. - 1/8 ID red
- C. - 3/16" ID black
- D. - 3/16" ID blue
- E. - 1/4" ID blue
- F. - 1/4" ID blue
- G. - 3/8" ID black
- H. - 1/2" ID black
- I. - 3/4" ID black

9 items - 103 total pieces



**Self-Igniting Super Blaster Torch
MTMT51**



Hot Air Gun

- A. MTEC1001 - Deflector
- B. MTEC100

Two heat settings: 500°F and 1000°F, UL listed at 120V ac, Lightweight construction, Ideal for heat shrink, terminals, paint stripping and thawing.



Outdoor 300V Extension Cords

15 Amp rated - UL / CSA

3-conductor 12/3 SJTW yellow with lighted end 3-conductor 14/3 SJTW Black/orange

- A. M0500105-25'
- B. M0500106-50'
- C. M0500107-100'
- D. M0500111-25'
- E. M0500112-50'
- F. M0500113-100'



USA & CANADA

1-800-445-6611

FAX: 1-800-445-6690



PHOENIX, AZ

Phone: 602-268-0001

Fax: 602-268-0130

Visit us online at: www.lightingparts.com

E-mail us at: customerservice@lightingparts.com

IN-LINE BUTT CONNECTORS

- A. MH5710 / 12-10AWG
- B. MH5714 / 16-14AWG
- C. MH5716 / 20-18AWG
- D. MH5720 / 24-22AWG



CLOSED-END CONNECTORS

- A. MHL81810 / 22-14AWG
- B. MHL82214 / 18-10AWG



SEALED CRIMP & SOLDER CONNECTORS

- A. ML510 / 10-12AWG to 8AWG
- B. ML514 / 14-16AWG to 10-12AWG
- C. ML516 / 18-20AWG to 14-16AWG
- D. ML520 / 22-24AWG to 18-20AWG



SEALED NYLON CRIMP CONNECTORS

- A1. M516 / Red 18-20AWG
- A2. M514 / Blue 14-16AWG
- A3. M510 / Yellow 10-12AWG
- A4. M508 / Pink 8AWG
- B1. M5614 / Yellow 14-16AWG to 10-12AWG
- B2.. M5616 / Blue 18-20AWG to 14-16AWG




HOOK TERMINAL/3WAY BUTT CONNECTORS

- A. M41410 / Blue 14-16AWG
- B1. M5310 / Yellow 10-12AWG
- B2. M5314 / Blue 14-16AWG
- B3. M5316 / Red 18-20AWG



- A1. MKS5620
- A2. MKS5616
- A3. MKS5614
- A4. MKS5610
- B1. MLS5620
- B2. MLS5616
- B3. MLS5614
- B4. MLS5610
- C1. ML5620BP
- C2. ML5616BP
- C3. ML5614BP
- C4. ML5610BP



PART#	GAUGE	COLOR
SEALED CRIMP CONNECTORS		
KS56-20	22-24 to 18-20 AWG	Red
KS56-16	18-20 to 14-16 AWG	Blue
KS56-14	14-16 to 10-12 AWG	Yellow
KS56-10	10-12 AWG to 8 AWG	Pink
SEALED CRIMP & SOLDER CONNECTORS		
ML56-20	22-24 to 18-20 AWG	Red
ML56-16	18-20 to 14-16 AWG	Blue
ML56-14	14-16 to 10-12 AWG	Yellow
ML56-10	10-12 AWG to 8 AWG	Pink
NON-INSULATED CONNECTORS		
ML56-20-8P	22-24 to 18-20 AWG	
ML56-16-8P	18-20 to 14-16 AWG	
ML56-14-8P	14-16 to 10-12 AWG	
ML56-10-8P	10-12 AWG to 8 AWG	

USA & CANADA

1-800-445-6611

FAX WATS 1-800-445-6690

Visit us online at: www.lightingparts.com



PHOENIX, AZ

Phone: 602-268-0001

Fax: 602-268-0130

E-mail us at: customerservice@lightingparts.com

CABLE GRIPPERS AND ACCESSORIES


Cable and Grippers Load Specifications

Cable Diameter	Cable Material	Cable Construction	Maximum Weight for 1 Cable	Maximum Weight for 2 Cables	BREAK POINT*
3/64"	Galv	1 x 19	17	34	82
1/16"	Galv	1 x 19	52	104	262
3/32"	Galv	1 x 19	104	208	520
3/32"	Galv	7 x 7	106	212	528
3/32"	Galv	7 x 19	105	210	520




MGR-1/8

Mini gripper with safety locking nut, nickel finish with base exit for 1/16" cable. Base threaded for 1/8 IP thread.




GR-1/4

Gripper with safety locking nut, nickel finish with base exit for 3/32" cable. Base threaded for 1/4 IP thread.




MGR-1/4-20

Mini gripper, nickel finish for 1/16" cable. Cable exits out bottom which has 1/4-20 external thread.




MICRO-GR

Micro gripper with or without safety locking nut, nickel finish with base exit for 3/64" cable. Base nut included.




GR-1/4-IP-TN

Gripper, nickel Gripper, nickel cable. with side exit for 1/16" cable. Base tapped for 1/4-20 machine screw.




MGR-SE-1/4-20 MGR-SE-8/32

Mini gripper with safety locking nut, nickel finish with side exit for 1/16" cable. Base tapped for 1/4-20 machine screw.




GR-1/2-IP GR-3/8-IP

Gripper for 3/32" cable. Cable exits out the bottom of the gripper.



CC-Slot

Ceiling coupler, for slope ceilings. Machined two pieces, accepts up to 3/32" diameter cable assemblies. Rear base mounts to wall or ceiling.




CC-1/4x1/8-IP

Machined two part, nickel plated brass. Inside is threaded 1/4-20 and external threaded 1/8 IP.




MGR-SE-ADJ-8/32

Mini gripper, with side exit for 1/16" cable. Bottom has a moveable foot with internal thread of 8/32.



GR-1/2-IP-PF

Power feed gripper for up to 3/32 diam. cable. Cable exits out the bottom of gripper. Power cord enters through side opening of gripper exits out the bottom with cable.



GRIPPER AND TIEDOWN

All cable Assemblies are Stainless Steel. All are with stops. Cable assemblies include burnt end for insertion in grippers and die-cast stop for all series CC ceiling couplers. Stainless Steel 7 x 7 strand construction is standard. Custom diameters, lengths, ends, and materials are available.

A. C364-50	-3/64" x 50"	F. C364-100	-3/64 x 100"
B. C364-150	-3/64" x 150"	G. C116-50	-1/16" x 50"
C. C116-100	-1/16" x 100"	H. C116-150	-1/16" x 150"
D. C332 -50	-3/32" x 50"	I. C332-100	-3/32" x 100"
E. C332-150	-3/32" x 150"		



A. KWIC-LOC CABLE GRIPPERS

KL-100-1/16 -1/16" & 3/32"
 KL-200-1/8 -1/8" & 3/16"

HARDWARE

BB1/4-20 -Bracket bar for J-box, with ground screw and 1/4-20 stud 11 ga. metal

B. POWER CORD

Available: wire braided
 18/3 300V
 CGWB -stranded
 18/3 600V
 CGWBS -solid

C. Cable & Cord Adjuster CC932


• PRICES MAY VARY DUE TO RAW MATERIAL COSTS.
 PLEASE CALL TOLL FREE NUMBER WHEN ORDERING.

Kwic-Loc Cable Grippers



A.

Recommendations:
 Do not use for loads outside the stated range of the product. Do not exceed the safe working load of the product. Do not use on coated wire rope. Do not apply grease or other coatings. Do not apply lubricant. Do not use for lifting. Keep product clear and free of dirt. Remove damaged cable ends prior to insertion into the Kwic-Loc. Do not use in chlorinated atmospheres.
 The Kwic-Loc gripper has been independently tested to beyond five times its allowable working load by the following independent laboratories:
 RADCO Inc., Long Beach, CA.
 New York Testing Laboratories
 SMACNA Testing and Research Center



Cutaway view of the Kwic-Loc gripper

B.



C.

CABLE ASSEMBLIES

Cable assembly, stainless steel, 1/16" diameter, 7 x 7 construction, in different lengths with die cast end, captive 1/4-20 integral ceiling coupler, and threaded end 1/4-20.

A. C116-15TE -15"	E. C116-18TE -18"
B. C116-21TE -21"	F. C116-24TE -24"
C. C116-27TE -27"	G. C116-30TE -30"
D. C116-36TE -36"	H. C116-42TE -42"


Cable Assemblies

Standard diameter cable with die-cast stop

Cutaway of a ceiling coupler and die-cast stop



3/32 1/16 3/64



USA & CANADA

1-800-445-6611

FAX WATS 1-800-445-6690



PHOENIX, AZ

Phone: 602-268-0001

Fax: 602-268-0130

Visit us online at: www.lightingparts.com

E-mail us at: customerservice@lightingparts.com

SPECIAL CORD ACCESSORIES

Cord Connect

This is a great accessory for those extended jobs that may have more than one extension cord involved. The hard plastic casing helps protect your power supply and serves as a safety device at the same time. Incredibly durable and able to handle industrial strength jobs anywhere in any condition.



Safcord

Save yourself a trip with Safcord! Keep your home and workplace safe by securing all appliance cords under one industrial strength protective strap. The Safcord has the ability to secure multiple cords and works great on carpeted surfaces.



Secure-A-Cord

Ensure your appliances are securely connected while working on those larger jobs.



USA & CANADA
1-800-445-6611
FAX WATS 1-800-445-6690









MILLER
O.E.M. SUPPLIES, INC.

PHOENIX, AZ
Phone: 602-268-0001
Fax: 602-268-0130

Visit us online at: www.lightingparts.com

E-mail us at: customerservice@lightingparts.com

TIDYCORD™






STYLE NO.	DESCRIPTION/PACKAGING	ILLUSTRATION
M400000	40" WHITE LENGTH- 1 PER POLY-BAG	
M401000	40" BRASS LENGTH- 1 PER POLY-BAG	
M402000 M4020S	40" CHROME LENGTH- 1 PER POLY-BAG	
M40002	FLAT ELBOW WHITE- 1 PER CARD	
M40003	INSIDE ELBOW WHITE- 1 PER CARD	
M40004	OUTSIDE ELBOW WHITE- 1 PER CARD	
M40005	COUPLING WHITE- 2 PER CARD	
M40036	VALUE PACK 3- 40" LENGTHS WHITE 02- F. E. 02- C.I.L. 01- O.E. 01- I.E.	




Tidy Cord Colors : White, Polished brass, Chrome

WIRE

CABLETUCK™

STYLE NO.	DESCRIPTION/PACKAGING	ILLUSTRATION
M46000	46" WHITE LENGTH- 1 PER POLY-BAG	
M46002	FLAT ELBOW WHITE- 1 PER CARD	
M46003	INSIDE ELBOW WHITE- 1 PER CARD	
M46004	OUTSIDE ELBOW WHITE- 1 PER CARD	
M46005	COUPLING WHITE- 1 PER CARD	

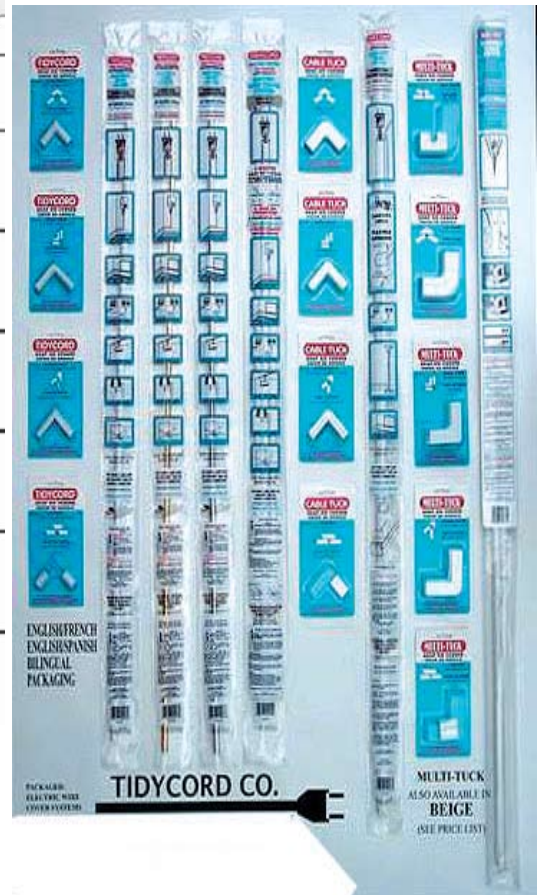

Quick, Easy, Electric Wire Cover System
No tools required. Snap on connectors.
Self-sticking. Professional results.

USA & CANADA

1-800-445-6611

FAX WATS 1-800-445-6690

Visit us online at: www.lightingparts.com



PHOENIX, AZ

Phone: 602-268-0001

Fax: 602-268-0130

E-mail us at: customerservice@lightingparts.com