



## CFL ELECTRONIC SMART BALLASTS

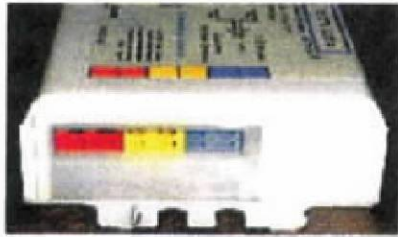


SIDE VIEW

Size: L-5", W-2-3/8", H-1"

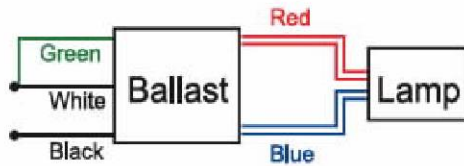

- Preheat rapid start
- Series operation
- High power factor
- Encased & potted
- Sound rated A
- End of lamp life protection
- Meets FCC part 18 (class B)
- Color white
- Weight .8 lb

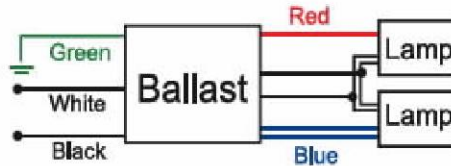

- Electronic Ballast
- 120 thru 277VAC
- 50/60 Hz.
- Min. starting temp. -20°C
- Max. case temp. 75° C
- Remote mounting 18ft.
- Compatible with Emergency Battery Packs
- UL/cUL class P, type 1 outdoor
- Thermal protection
- No PCB's

### 13W

ELECTRICAL SPECIFICATION: MRB1213

Line Voltage (V)	Lamp Type	Lamp Watts	No. of Lamps
120	CFQ13W/G24q	13	2
277	CFTR13W/GX24q		
120	CFQ13W/G24q	13	1
277	CFTR13W/GX24q		
120	CFQ18W/G24q	18	1
277	CFTR18W/GX24q		
120	F14T5	14	2
277			1
120	F14T5	14	2
277			1
120	F13T5	13	2
277			1
120	F13T5	13	2
277			1

### 18W

ELECTRICAL SPECIFICATION: MRB1218

Line Voltage (V)	Lamp Type	Lamp Watts	No. of Lamps
120	CFQ13W/GX7	13	2
277			1
120	CFQ13W/GX7	13	1
277			1
120	CFQ18W/G24q	18	2
277	CFTR18W/GX24q		
120	CFQ18W/G24q	18	1
277	CFTR18W/GX24q		
120	CFQ26W/G24q	26	1
277	CFTR26W/GX24q		
120	CFS28W/GR10q	28	1
277	CFS28W/GR10q		
120	CFS21W/GR10q	21	1
277	CFS21W/GR10q		

### 26W

ELECTRICAL SPECIFICATION: MRB1226

Line Voltage (V)	Lamp Type	Lamp Watts	No. of Lamps
120	CFQ26W/G24q	26	2
277	CFTR26W/GX24q		
120	CFQ26W/G24q	26	1
277	CFTR26W/GX24q		
120	CFTR32W/GX24q	32	1
277	CFTR32W/GX24q		
120	CFTR42W/GX24q	42	1
277	CFTR42W/GX24q		
120	FT24W/2G11	24	2
277	FT24W/2G11		
120	F24T5HO	24	2
277	F24T5HO		
120	FC16T9	40	1
277			1

Special Dual Entry - Side and Bottom

USA & CANADA  
1-800-445-6611  
FAX: 1-800-445-6690



PHOENIX, AZ  
Phone: 602-268-0001  
Fax: 602-268-0130