


HALOGEN MR16, MR11



MR16 STANDARD BASE: JDR E26 TYPE

ITEM	WATTS	VOLTS	BASE	LIFE HOUR	FINISH	PACKING INNER MSTR	APPROX. BEAM
JDR35F/E26	35W	120V	STD.	2000	WIDE	10/200	28"
JDR50S/E26	50W	120V	STD.	2000	NARROW	10/200	10"
JDR50F/E26	50W	120V	STD.	2000	WIDE	10/200	28"
JDR75S/E26	75W	120V	STD.	2000	NARROW	10/200	10"
JDR75F/E26	75W	120V	STD.	2000	WIDE	10/200	28"
JDR100S/E26	100W	120V	STD.	2000	NARROW	10/200	10"
JDR100F/E26	100W	120V	STD.	2000	WIDE	10/200	28"

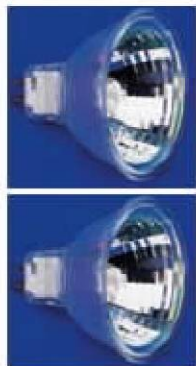


MR11 WITH COVERS

WATTS	PART NO.	ANSI CODE	VOLTS	COLOR	BEAM ANGLE	BASE	LIFE
20	B1319	FTD	12	CLEAR	30	BI-PIN	2000
20	B1319B	FTD	12	BLUE	30	BI-PIN	2000
20	B1319G	FTD	12	GREEN	30	BI-PIN	2000
20	B1319R	FTD	12	RED	30	BI-PIN	2000
20	B1319Y	FTD	12	YELLOW	30	BI-PIN	2000
35	B1320	FTH	12	CLEAR	30	BI-PIN	2000
35	B1320B	FTH	12	BLUE	30	BI-PIN	2000
35	B1320G	FTH	12	GREEN	30	BI-PIN	2000
35	B1320R	FTH	12	RED	30	BI-PIN	2000
35	B1320Y	FTH	12	YELLOW	30	BI-PIN	2000

LIGHT DISTRIBUTION CHART

Application Range for Low voltage Tungsten Halogen Lamps with Reflector.

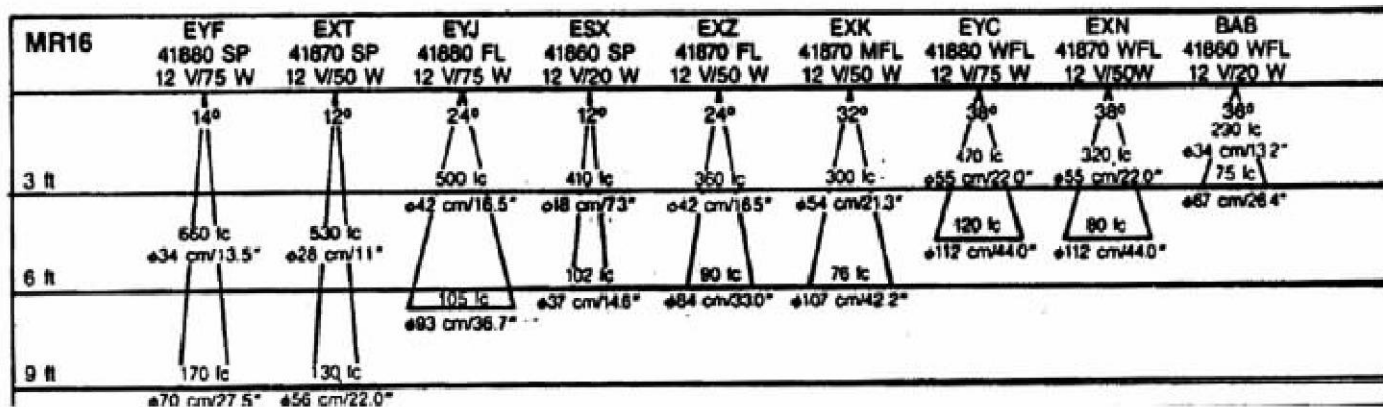

USA & CANADA

1-800-445-6611

FAX WATS 1-800-445-6690

www.MillerLightingProducts.com



PHOENIX, AZ

Phone: 602-268-0001

Fax: 602-268-0130

customerservice@millerlightingproducts.com