

SMOKE DETECTORS

SD914 ionization smoke

- Battery powered
- Low battery indicator
- Test button



SD1275 ionization smoke

- Battery back-up with pull tab
- Alarm memory
- Low battery indicator
- 120V AC wired-in



SD1235 ionization smoke

- Alarm memory
- Test button
- Quick connect harness
- 120V AC wired-in



SD9C05 carbon smoke

- Electronic sensor
- 85db alarm
- Battery operated
- Test button
- Snap open cover



RETRO KITS & NIGHT LIGHTS

LED Retrofit Kits

Screw-in Units

- A. MKRSR (Red Light)
- B. MKSG (Green Light)

FEATURES: For 120V or 277V applications 2.8 Watts per kit, Socket adapters supplied. (For signs with bayonet, intermediate or candleabra bases), Each unit is 5-1/8" wide. (Add 1/8 when using adapters)



LED Retrofit Kits

Hard Wire Units


- A. MKHR (Red Light)
- B. MKSG (Green Light)

FEATURES: For 120V or 277V applications, 2.8 Watts per kit, Kits come complete with mounting bracket & double face tape.



- A. Rotational Light 120V 5W bulb 360 degree rotation can be set in any position bulb included. E933 -ivory w/bulb E933W -white w/bulb
- B. L835 -Mini-Fluorescent Utility Light w/ on/off switch 120V AC

- C. Standard with on/off switch Polarized Plug 120V Ivory E850 -7w E850-4 -4w E850-1W -white E850-1 -Base only
- D. Base & Bulb E850-2 -7w E850-24 -4w E850-24W -4W white
- E. Clip -E850CP

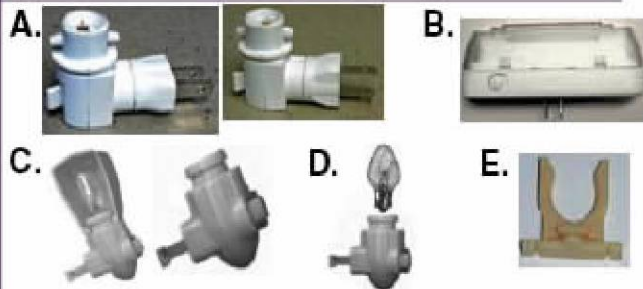

Power Failure Emergency Night Light

D9610D

FEATURES: Low power consumption, 12 cents per year based on eight cents per KWHR, Light brightens when power is lost, Battery backup provides over 4 days of light, Red light illuminates when batteries need to be replaced, Cool to the touch. Uses 3 "AAA" alkaline batteries (NOT included).



Emergency Lighting

EX2

FEATURES: Completely self-contained, fully automatic operation, compact, low profile design in neutral finish, Universal mounting plate with "EZ" Quick Connect for rapid labor saving installation, Push to test switch, 6-Volt, pure lead, maintenance-free battery, environmentally-coated, solid state charger. Automatic, low voltage disconnect (LVD), Universal transformer for 120 or 277 VAC. Listed for damp location, Injection-molded, V-0 flame retardant, high impact, thermoplastic housing, Charge rate/power on LED indicator light.



H: 5" x W: 11.75"
(light ends W: 16")

USA & CANADA

1-800-445-6611

FAX: 1-800-445-6690



PHOENIX, AZ

Phone: 602-268-0001

Fax: 602-268-0130