


Electronic Socket & Ballasts 277VAC

GU24- 4 Pin CFL - 277 VAC UL

Electronic Self-Ballasted CFL Lampholders - Less Caps
(Smooth Phenolic)

- A. DR13277 13W G24q-1 & GX24q-1 60Hz 0.15A 2" H
- B. DR13UR277 13W G24q1 & GX24q-1 w/ Ring 60Hz 0.15A 2" H
- C. DR18277 18W G24q-2 & GX24q-2 60Hz 0.20A 2" H
- D. DR18UR277 18W G24q-2 & GX24q-2 w/ Ring 60Hz 0.20A 2" H
- E. DR26277 26W G24q-3 or GX24q-3 60Hz 0.30A 2" H
- F. DR26UR277 26W G24q-3 or GX24q-3 60Hz 0.30A 2" H

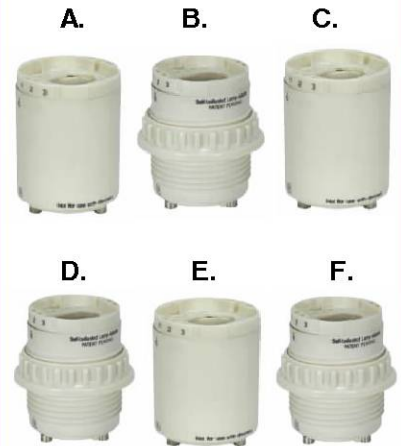


Electronic Socket Caps 277VAC

CFL Self Ballast 277VAC UL

GU24 - also for 4 - Pin Ballast & Socket Combinations

- G. DR15277 1/8 IP Hickey, 3/4" Height, 24" 18AWM 105 degree Leads
- H. DR16277 U-Channel 1/8 IP Bushing, 1-1/8" Height 24" 18AWM 105 degree Leads
- I. DR20277 Side mount 1/8 IP Hickey, 3/4" Height, 24" 18AWM 105 degree Leads
- J. DR60277 Snap bracket, 3/4" Height, 24" 18AWM 105 degree Leads
- K. DR61277 L- Bracket, 3/4" Height, 24" 18AWM 105 degree Leads
- L. DR63277 Double Snap Bracket, 3/4" Height, 24" 18AWM 1058 degree Leads

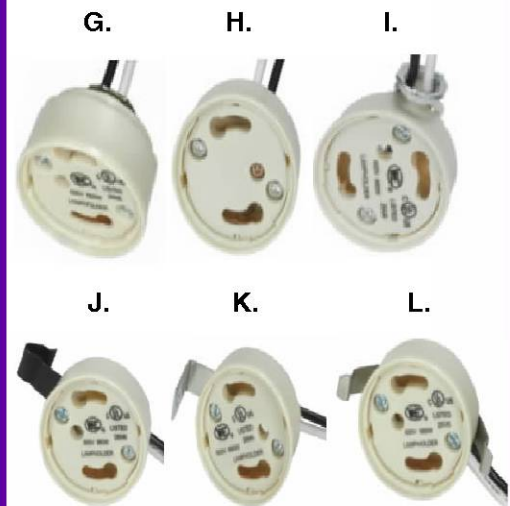

ARE YOU A SUBSCRIBER TO MILLER LIGHTING PRODUCTS EMAIL BLASTS?

RECEIVE OUR SPECIALS, UPDATES, ECONOMIC STIMULUS, ENERGY SAVINGS PRODUCT OF THE MONTH, etc., SIGN UP ON LINE TODAY OR CALL CUSTOMER SERVICE NOW!

USA & CANADA

1-800-445-6611

FAX 1-800-445-6690



Phoenix, AZ

Phone: 602-268-0001

FAX: 602-268-0130